

# L01

## 1.27mm FLAT RIBBON CABLE

UL File No. : E162690

UL Style : 2651

Operating Temperature : -20°C to +105°C

Flammability Rating : UL-VW-1

Voltage Rating : 300V

### Physical

Insulation Material : Polyvinyl Chloride (PVC)

Conductor : #28AWG (7\*0.127) Stranded Tinned Copper

#26AWG (7\*0.16) Stranded Tinned Copper

Color : Grey With Red Edge

### Electrical


Impedance : 115Ω (Unbalanced)

Capacitance : 12.2 pF/ft.

Inductance : .14μH/ft.

Propagation Delay : 1.4 ns/ft.

Insulation Resistance : 1GΩ/M min.

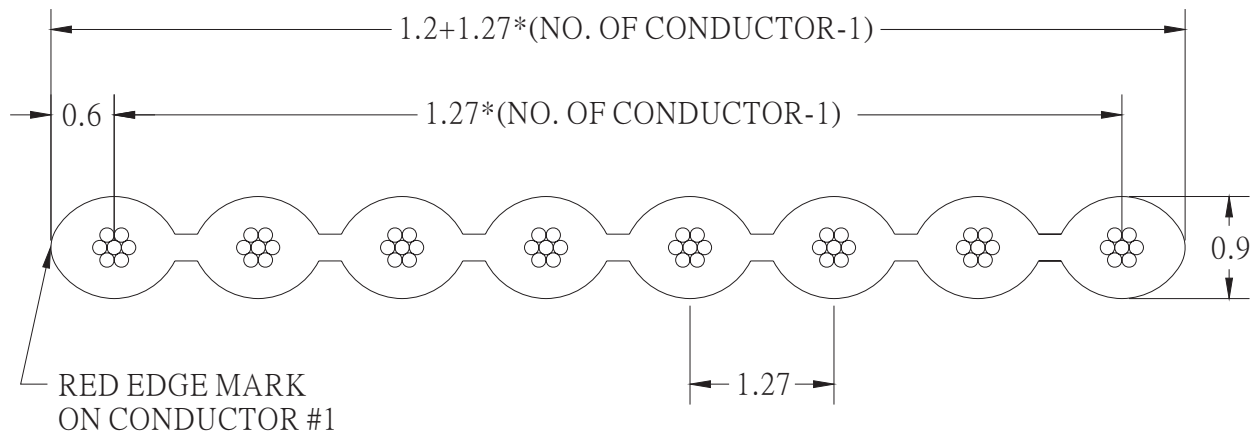

### HOW TO ORDER:

L01 -  -  -  - /UNIT - G (RoHS)

1.NO. OF CONDUCTOR	2.INSULATION MATERIAL	3.WIRE SIZE	4.CABLE LENGTH / UNIT
06 TO 64	P: PVC	A: 28 AWG B: 26 AWG	C: CM F: FEET I: INCH M: METER